
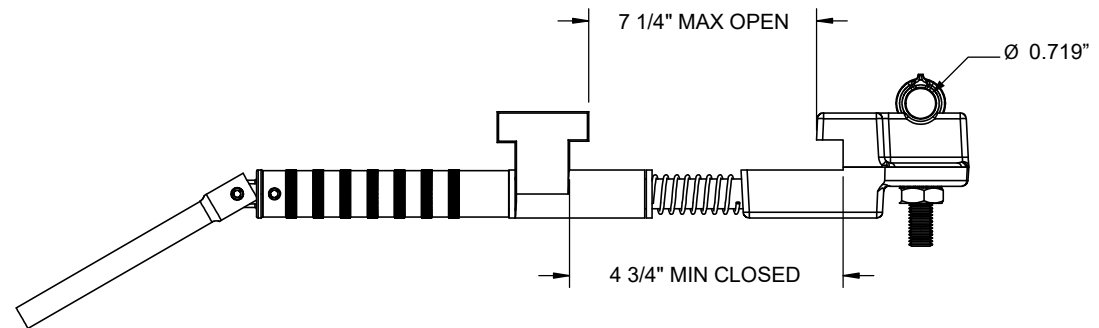
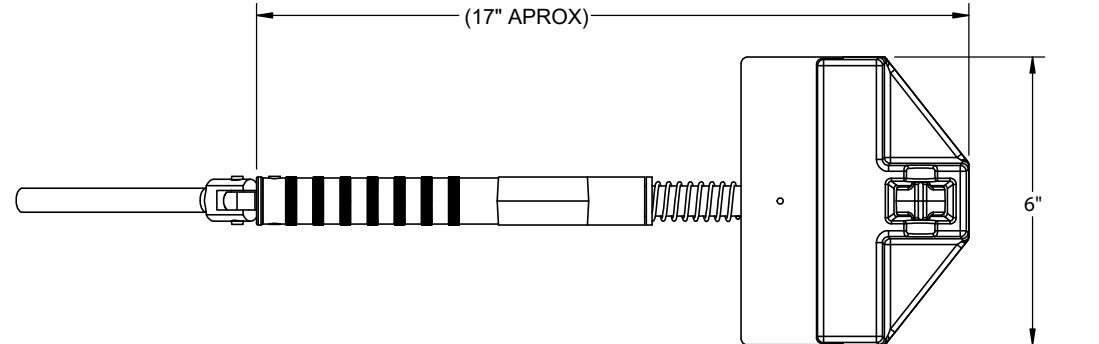


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	NEW RELEASE	01/07/2024	J. LEE

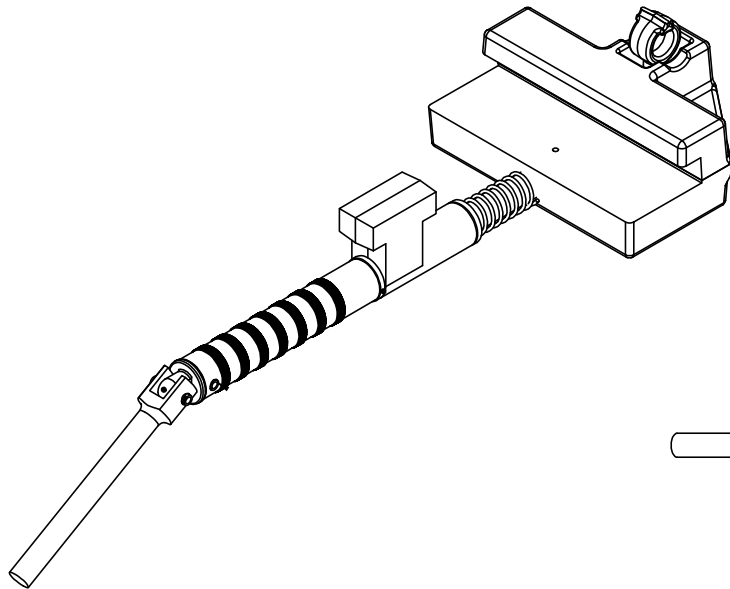

**UNDER RAIL CLAMP**  
 Main Line:  
 Minimum: 5 Inch  
 Maximum: 6 Inch

Material: Aluminum

Inside Diameter, Ring: 0.719"

Jaw: Smooth  
 Size: 90 to 136 Lbs.

Current:  
 First Peak Current: 70 kA or less 61  
 kA peak for 250 msec (15 cycles) 43  
 kA RMS for 250 msec (15 cycles)  
 400 A Continuous operating Current

Tested per ASTM 855  
 Made in the USA

DO NO SCALE THIS DRAWING  ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED  TOLERANCE: ANGLES ± 0.5° DEC. .XX ± 0.03 DEC. .XXX ± 0.010	DRAWN BY <b>D. MILLER</b>	DATE 01/07/2024	 www.silverstatewire.com
	CHECKED BY <b>J. LEE</b>	DATE 01/07/2024	
	APPROVED BY <b>J. LEE</b>	DATE 01/07/2024	
	APPROVED BY <b>N/A</b>	DATE N/A	
THIS DRAWING IS THE PROPERTY OF SILVER STATE WIRE & CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF THIS DESIGN WITHOUT THE WRITTEN PERMISSION OF SILVER STATE WIRE AND CABLE.	DESCRIPTION 03-02-10070, Under Rail Clamp (90-136 lbs RAIL), 0.719 inch ID ring		SIZE <b>A</b>
CAGE CODE <b>01CV1</b>		DWG NO. <b>J-9378-00443</b>	REV <b>-</b>
SCALE <b>NONE</b>		WT <b>N/A</b>	SHEET 1 OF 1