


Part Number: S-7244-9627

DESCRIPTION:	20 AWG, MULTI-CONDUCTOR, SHIELDED	
CONDUCTOR:	20 AWG (259x44) TIN PLATED COPPER, 0.041" +/- 0.0025" DIAMETER	
INSULATION:	EXTRUDED FEP, 0.053" OD, +/- 0.0025"	
COLORS:	PAIR #1	WHITE
		BROWN
	PAIR #2	GREEN
		YELLOW
CABLE:	CABLE (2) PAIRS	
BINDER:	PTFE TAPE WRAP - 0.239" DIAMETER (NOM.)	
SHIELD:	TIN PLATED COPPER, 40 AWG, SPIRAL WRAP	
JACKET:	EXTRUDED POLYURETHANE, BLACK (MATTE FINISH) to 0.268" DIAMETER (NOM.) +/-0.005", Estane® 58284	
JACKET PRINT: (TO BE PRINTED IN YELLOW, GRAY OR WHITE)	005-9866	S-7244-9627 REV. A

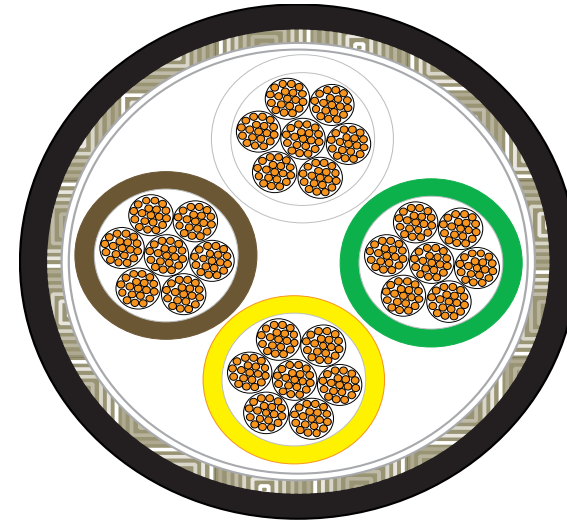

*Estane® 58284 is a Trademark of Lubrizol

Performance Characteristics	
TEMPERATURE RANGE:	-55°C TO +90°C
DIELECTRIC VOLTAGE RATING:	300 VOLTS
WEIGHT:	47.40 LBS PER 1,000 FEET

REVISIONS	–	5/22/2014	NEW RELEASE	THIS DRAWING IS THE PROPERTY OF SILVER STATE WIRE & CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASES FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITH OUT THE WRITTEN PERMISSION OF SILVER STATE WIRE & CABLE
	A	5/23/2014	PRINT LEGEND UPDATE	
				APPROVED BY: J. LEE
				DRAWN BY: R. LANE
				DRAWING NO: S-7244-9627



50 E. GREG STREET, SPARKS, NV. 89431
 PH: 775-356-8969 FAX: 775-356-3948
 WEB SITE: WWW.SILVERSTATEWIRE.COM