

A

B

C


D

E

Part Number: SS1237-2

DESCRIPTION

CONSTRUCTION:	2 AWG HIGH FLEX WIRE
CONDUCTOR:	2 AWG (665 X 30) TIN PLATED COPPER, ROPE LAY, ATSM-B-172
INSULATION:	EXTRUDED FLUORONATED ETHYLENE-PROPYLENE
INSULATION COLOR:	RED
INSULATION WALL:	0.025" WALL, +/- 0.005"
OVERALL DIAMETER:	0.380", +/- 0.009"

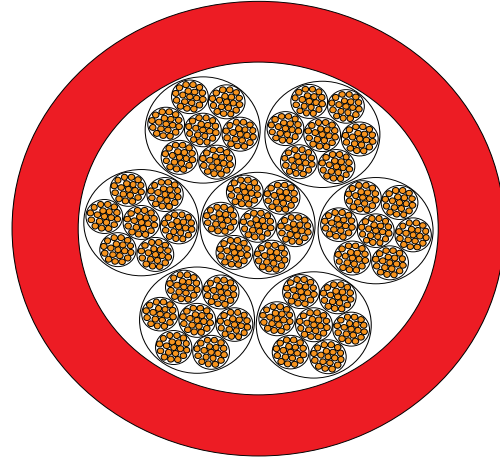

Performance Characteristics

DIELECTRIC WITHSTANDING VOLTAGE:	800 Volts (RMS)
TEMPERATURE:	-55°C to +150°C

REVISIONS	-	7/3/2017	New Release
			THIS DRAWING IS THE PROPERTY OF SILVER STATE WIRE & CABLE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASES FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITH OUT THE WRITTEN PERMISSION OF SILVER STATE WIRE & CABLE, INC.
			APPROVED BY: R. LANE
			DRAWN BY: J. LEE
			DRAWING NO:
			SS1237-2

SSWC

50 E. Greg Street, Sparks, NV. 89431
PH: 775-356-8969 FAX: 775-356-3948
WEB SITE: WWW.SILVERSTATEWIRE.COM

A

B

C

D

E