


160 SERIES

BOTTLE SHAPES WITHOUT RIB



This style is a straight boot used for cable strain relief and environmental protection.

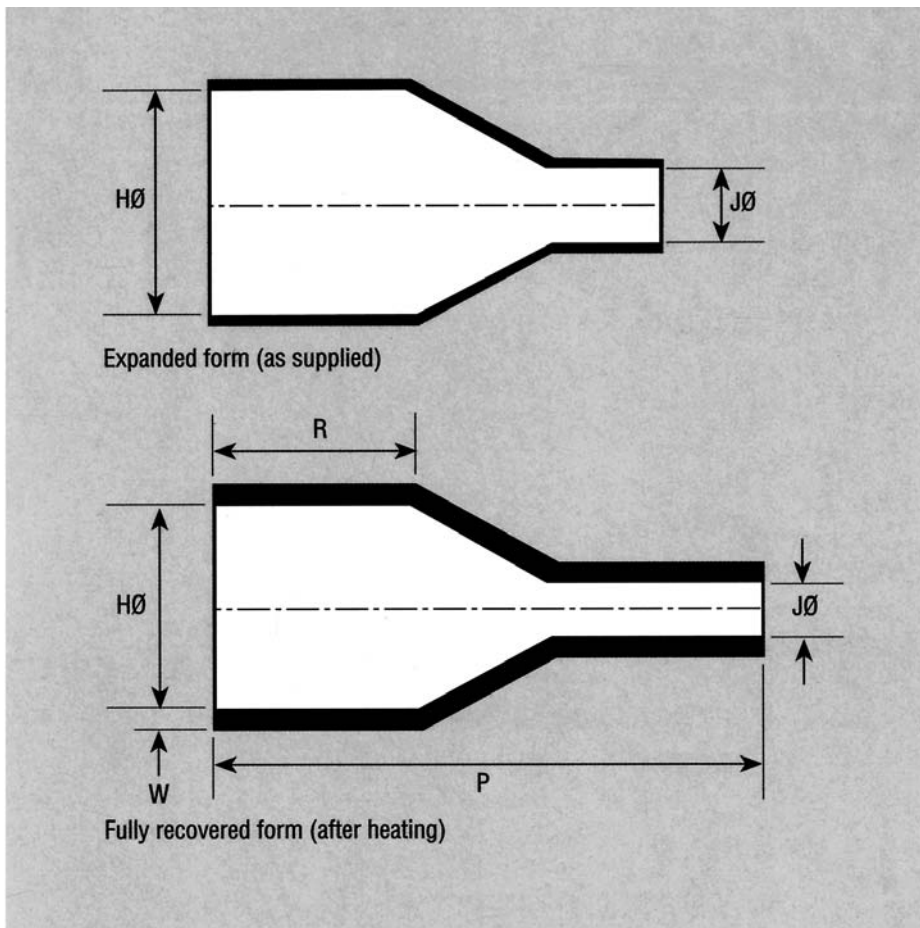

Dimensions apply to all materials unless otherwise indicated and are in inches.

Hellermann Part No.	Expanded (Min)		Recovered (Max)		Recovered dimensions fully shrunk		
	H	J	H	J	P ±10%	R ±10%	W ±20%
162-1	0.87	0.35	0.56	0.16	1.53	0.62	0.07
169-1	0.88	0.31	0.70	0.22	2.00	1.08	0.11
169-2	1.40	0.34	0.70	0.22	2.00	1.08	0.11

MATERIALS AVAILABLE

Reference	Specification	Description
J	MIL-I-81765/TYPE II	Flexible polyolefin
B7	MIL-I-81765/TYPE I	Semi-rigid flame retarded polyolefin
G	VG 95343 PART 6	Fluid resistant elastomer
H	NAVSEA 5617649	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS

Reference	Description
WM250	General purpose hot melt +80°C
W8	High performance hot melt +105°C
W24	1 Part Epoxy 200°C

For ordering procedure – refer to page 5