


GSR Graduated Strain Relief

• Helashrink 1750 Series, with rib


This style is ideally suited for shipboard and railway carriage cabling. The key features are: very robust, superior crush resistance and excellent strain relief. The wall thickness varies with long tail, allowing setting at varying angles through 90°.



1751-1 supplied / fully recovered.

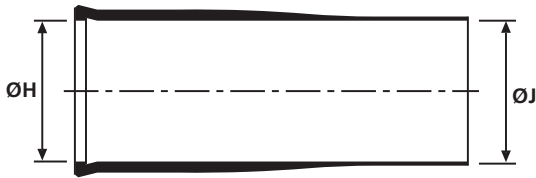

a: Expanded form (supplied)

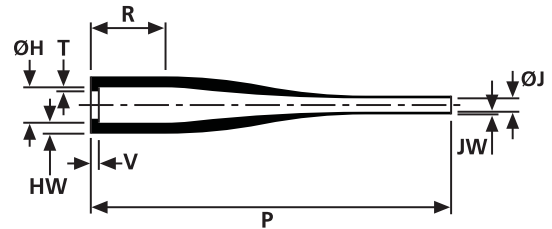

b: Fully recovered form (after heating)

Sizes and Type Table

Type	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	T ± 10%	V ± 10%
1751-1	25.4	16.5	25.4	8.3	152.4	30.5	4.1	1.5	1.5	3.0
1751-2	33.0	16.5	33.0	8.4	153.0	30.5	4.1	1.5	1.5	3.0
1752-1	33.1	20.3	33.1	10.9	152.4	30.5	4.1	1.5	1.5	3.0
1752-2	43.2	20.3	43.2	10.9	153.0	30.5	4.1	1.5	1.5	3.0
1753-1	43.2	22.8	43.2	14.2	175.3	38.1	4.1	2.0	1.5	3.0
1753-2	53.3	22.9	53.3	14.2	175.3	38.0	4.1	2.0	1.5	3.0
1754-1	53.4	27.9	53.4	17.7	175.3	38.1	4.1	2.0	1.5	3.0
1754-2	72.4	27.9	72.4	17.8	175.3	38.0	4.1	2.0	1.5	3.0
1755-1	72.4	36.8	72.4	24.1	182.9	40.6	4.1	2.5	1.5	3.0
1755-2	87.0	36.8	87.0	24.1	184.0	41.0	4.1	2.5	1.5	3.0

All dimensions in mm. Subject to technical changes.

Combinations "On request"

Adhesive	Material			
	B7	G	J	H
WM250	√	√	√	√
W8	√	√	√	√
W24	√	√	√	√
V9500	√	√	√	√
HMT200A	√	√	√	√
W21	-	-	-	√
Without Adhesive	√	√	√	√

Standard combinations

Article-No.	Type
417-51001	1751-1-H
417-51009	1751-2-H
417-52001	1752-1-H
417-52005	1752-2-H
417-53001	1753-1-H
417-53005	1753-2-H
417-54001	1754-1-H
417-54005	1754-2-H
417-55001	1755-1-H
417-55005	1755-2-H