



# Part Number: S-2574-0017

Description	22/15 PVC/PVC UL2576 CABLE
Conductor	22 AWG Tinned Copper
Stranding	7/30
Insulation Material	PVC
Insulation Thickness	0.010" Nom
Insulated Conductor Diameter	.050"
Jacket Material	PVC
Overall Cable Diameter	0.294" NOM (.310" MAX)
Insulation Colors	Black, Red, White, Green, Orange, Blue, Brown, Yellow, Violet, Grey, Pink, Tan, Red/Green St., Red/Yellow St., Red/Black St.
Overall Cable Diameter	0.294" NOM (.310" MAX)
Custom Printing	PN: S-2574-0017 CAGE CODE: 01CV1 UL AWM STYLE 2576 80C 150V OR AWM I A/B 80C 300V FT-1 ROHS
Binder	Paper Wrap (No Mylar Tape Permitted)
Jacket Color	Grey

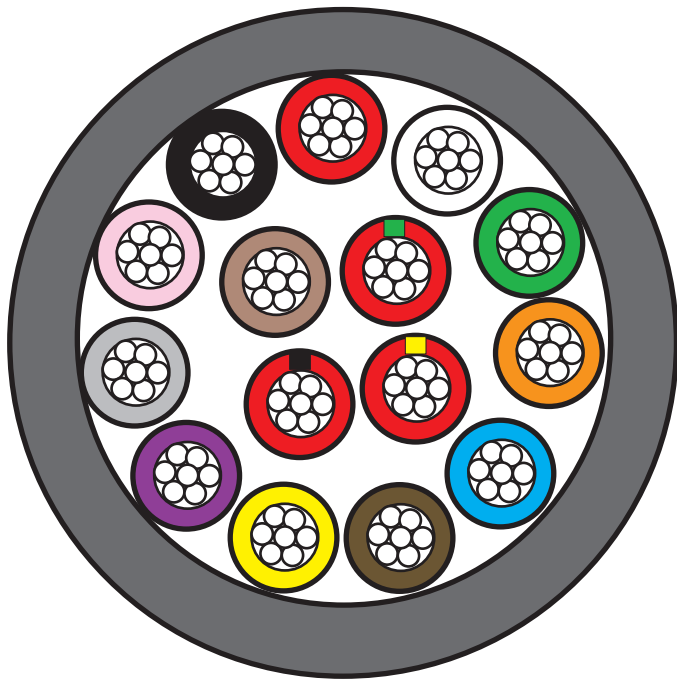

Performance Characteristics	
Temperature Rating	-20 C to 80 C
Operating Voltage	300 V RMS Max
Ratings	"C" UL2576
RoHS Compliant	YES

REVISIONS	-	10/27/08	New Release	THIS DRAWING IS THE PROPERTY OF SILVER STATE WIRE & CABLE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASES FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITH OUT THE WRITTEN PERMISSION OF SILVER STATE WIRE & CABLE, INC.		
	A	11/4/09	Print/Binder			
						APPROVED BY: J. LEE
						DRAWN BY: R. Lane
						DRAWING NO:
						S-2574-0017
					50 E. Greg St. #113, Sparks, NV. 89431 PH:775-356-8969 FAX: 775-356-3948 WEB SITE: WWW.SILVERSTATEWIRE.COM	